




- LEGEND:
- Lighting Point
 - KEONN LLP-CLP-R45X45 (F1) SQUARE LIGHT C/W 30W 3000K LED, INTEGRATED NON-DIM DRIVER AND MC098S SENSOR
 - KEONN LLP-CLP-R45X45 (F2) SQUARE LIGHT C/W 20W 3000K LED, INTEGRATED NON-DIM DRIVER
 - Weatherproof Wall Mounted Lighting Point
 - Light Point for MV Fan Point
 - 10A Single Pole One Way Switch (Figure indicates no. of gang)
 - Autogate Switch
 - Pedestrian Switch
 - 10A Single Pole Two Way Switch (Figure indicates no. of gang)
 - Intermediate Switch
 - Air Terminal
 - Down Conductor
 - Bonding to Lightning Protection System
 - 25mm x 3mm Aluminium Tape
 - 25mm x 3mm Copper Tape
 - Dedicated T10 Rebar Concealed in Slab
 - Earth Pit Inspection Chamber c/w Earth Electrode for Lightning Protection System
 - Earth Pit Inspection Chamber c/w Earth Electrode for Electrical Earth System
 - Lightning Protection Test Link
 - Stand Alone Smoke Detector (HfAD) with Sounder, Indicator Light, Silence/Rest Test Button Built-in Battery (Low Battery Alert) and Inter-connection Wirelessly within a House
 - Denotes Weatherproof

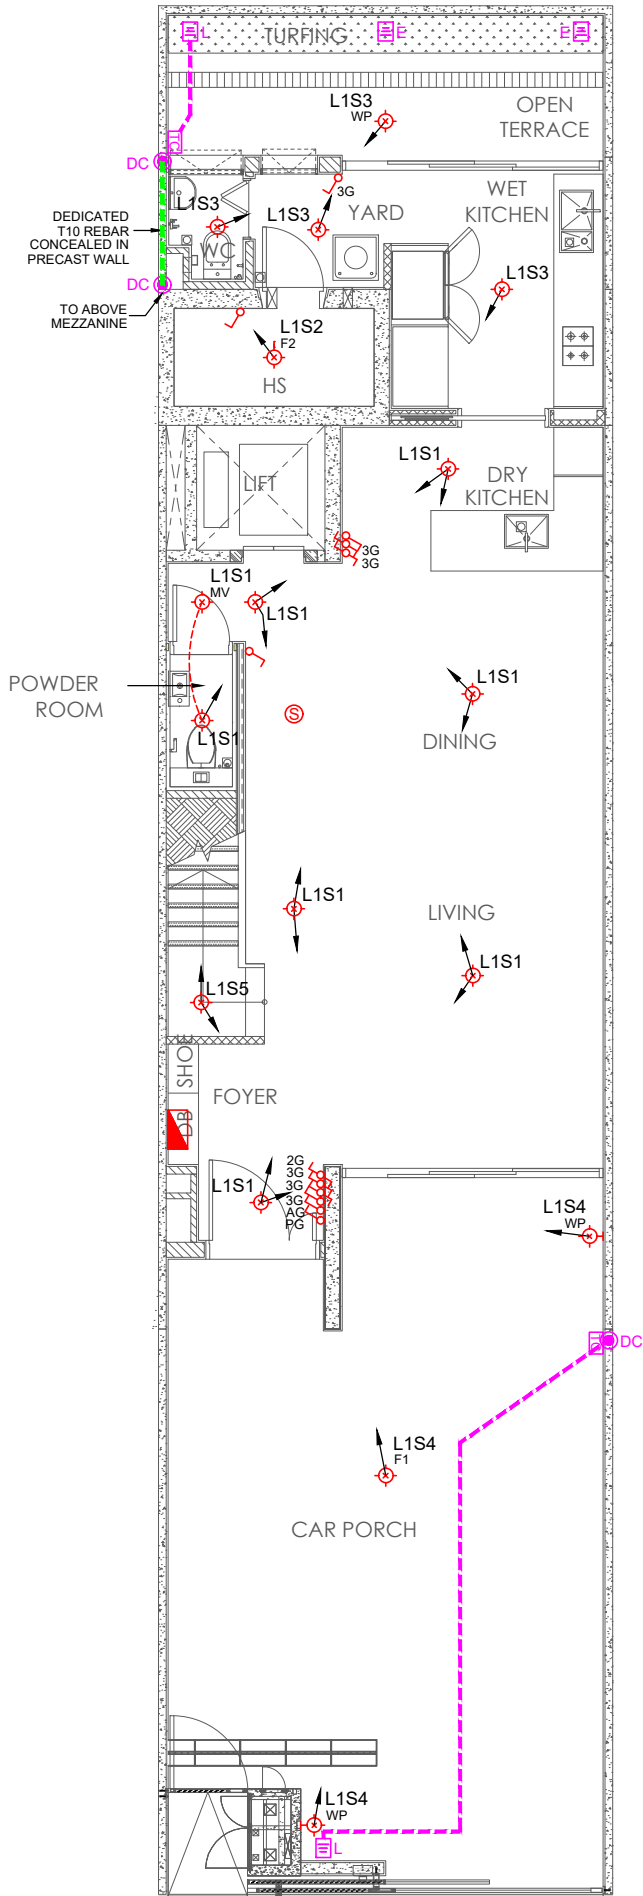


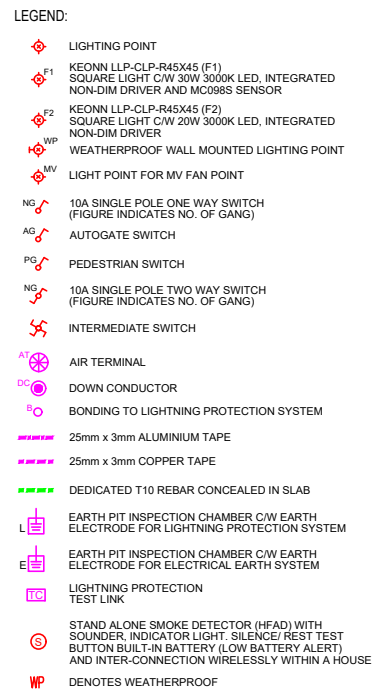


- LEGEND:
- ⬢ LIGHTING POINT
 - F1 KEONN LLP-CLP-R45X45 (F1) SQUARE LIGHT C/W 30W 3000K LED, INTEGRATED NON-DIM DRIVER AND MC098S SENSOR
 - F2 KEONN LLP-CLP-R45X45 (F2) SQUARE LIGHT C/W 20W 3000K LED, INTEGRATED NON-DIM DRIVER
 - WP WEATHERPROOF WALL MOUNTED LIGHTING POINT
 - MV LIGHT POINT FOR MV FAN POINT
 - NG 10A SINGLE POLE ONE WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - AG AUTOGATE SWITCH
 - PG PEDESTRIAN SWITCH
 - NG 10A SINGLE POLE TWO WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - INTERMEDIATE SWITCH
 - AT AIR TERMINAL
 - DC DOWN CONDUCTOR
 - BONDING TO LIGHTNING PROTECTION SYSTEM
 - 25mm x 3mm ALUMINIUM TAPE
 - 25mm x 3mm COPPER TAPE
 - DEDICATED T10 REBAR CONCEALED IN SLAB
 - L EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR LIGHTNING PROTECTION SYSTEM
 - E EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR ELECTRICAL EARTH SYSTEM
 - TEST LINK
 - STAND ALONE SMOKE DETECTOR (H/FAD) WITH SOUNDER, INDICATOR LIGHT, SILENCE/REST TEST BUTTON BUILT-IN BATTERY (LOW BATTERY ALERT) AND INTER-CONNECTION WIRELESSLY WITHIN A HOUSE
 - WP DENOTES WEATHERPROOF

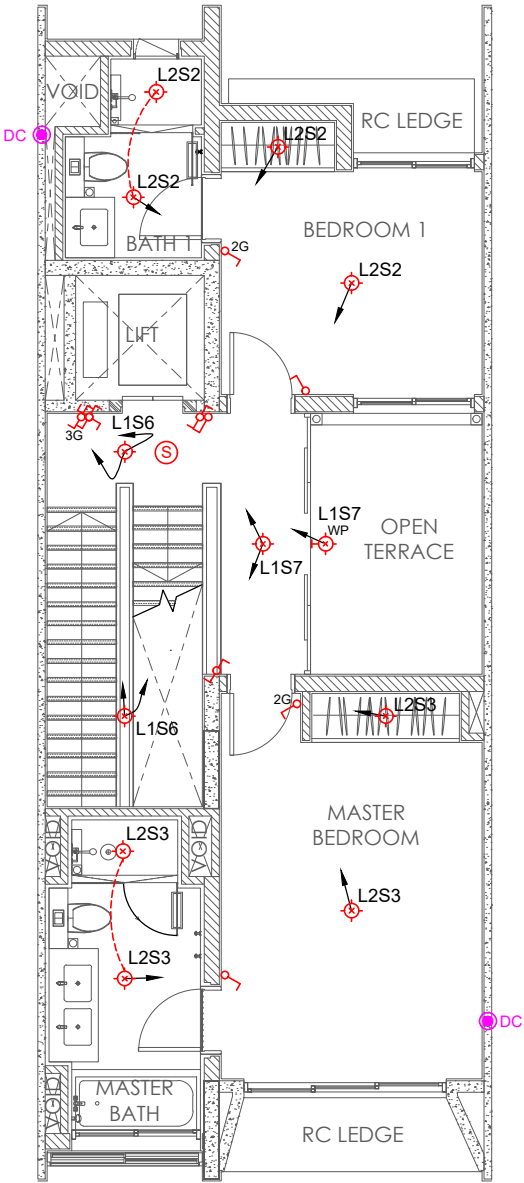

- LEGEND:
- ⬢ LIGHTING POINT
 - F1 KEONN LLP-CLP-R45X45 (F1) SQUARE LIGHT C/W 30W 3000K LED, INTEGRATED NON-DIM DRIVER AND MC098S SENSOR
 - F2 KEONN LLP-CLP-R45X45 (F2) SQUARE LIGHT C/W 20W 3000K LED, INTEGRATED NON-DIM DRIVER
 - WP WEATHERPROOF WALL MOUNTED LIGHTING POINT
 - MV LIGHT POINT FOR MV FAN POINT
 - NG 10A SINGLE POLE ONE WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - AG AUTOGATE SWITCH
 - PG PEDESTRIAN SWITCH
 - NG 10A SINGLE POLE TWO WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - INTERMEDIATE SWITCH
 - AT AIR TERMINAL
 - DC DOWN CONDUCTOR
 - BONDING TO LIGHTNING PROTECTION SYSTEM
 - 25mm x 3mm ALUMINIUM TAPE
 - 25mm x 3mm COPPER TAPE
 - DEDICATED T10 REBAR CONCEALED IN SLAB
 - L EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR LIGHTNING PROTECTION SYSTEM
 - E EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR ELECTRICAL EARTH SYSTEM
 - TEST LINK
 - STAND ALONE SMOKE DETECTOR (HEAD) WITH SOUNDER, INDICATOR LIGHT, SILENCE/REST TEST BUTTON BUILT-IN BATTERY (LOW BATTERY ALERT) AND INTER-CONNECTION WIRELESSLY WITHIN A HOUSE
 - WP DENOTES WEATHERPROOF

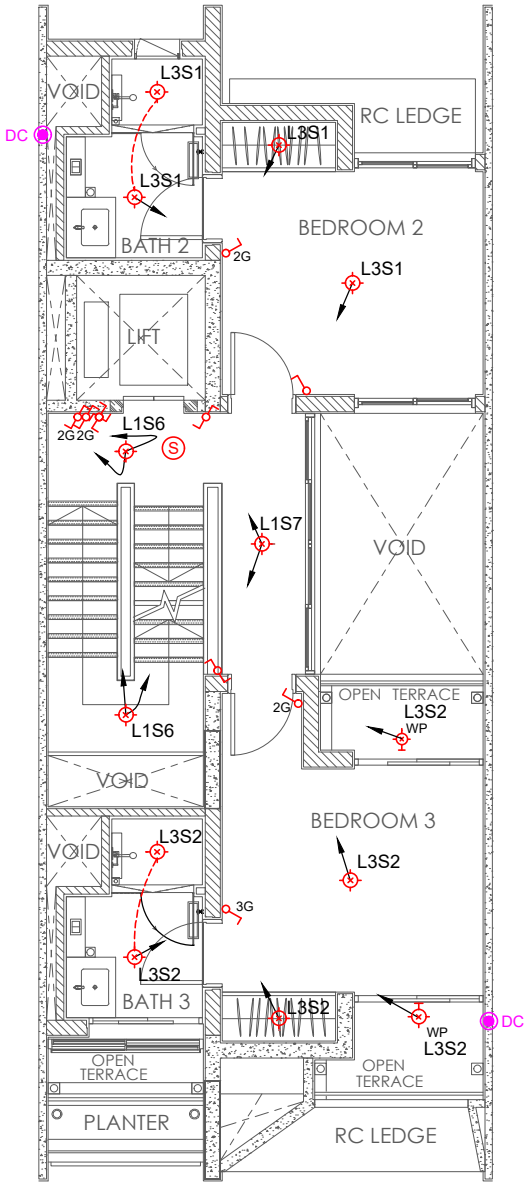

- LEGEND:
- LIGHTING POINT
 - KEONN LLP-CLP-R45X45 (F1)
SQUARE LIGHT C/W 30W 3000K LED, INTEGRATED
NON-DIM DRIVER AND MC098S SENSOR
 - KEONN LLP-CLP-R45X45 (F2)
SQUARE LIGHT C/W 20W 3000K LED, INTEGRATED
NON-DIM DRIVER
 - WEATHERPROOF WALL MOUNTED LIGHTING POINT
 - LIGHT POINT FOR MV FAN POINT
 - 10A SINGLE POLE ONE WAY SWITCH
(FIGURE INDICATES NO. OF GANG)
 - AUTOGATE SWITCH
 - PEDESTRIAN SWITCH
 - 10A SINGLE POLE TWO WAY SWITCH
(FIGURE INDICATES NO. OF GANG)
 - INTERMEDIATE SWITCH
 - AIR TERMINAL
 - DOWN CONDUCTOR
 - BONDING TO LIGHTNING PROTECTION SYSTEM
 - 25mm x 3mm ALUMINIUM TAPE
 - 25mm x 3mm COPPER TAPE
 - DEDICATED T10 REBAR CONCEALED IN SLAB
 - EARTH PIT INSPECTION CHAMBER C/W EARTH
ELECTRODE FOR LIGHTNING PROTECTION SYSTEM
 - EARTH PIT INSPECTION CHAMBER C/W EARTH
ELECTRODE FOR ELECTRICAL EARTH SYSTEM
 - LIGHTNING PROTECTION
TEST LINK
 - STAND ALONE SMOKE DETECTOR (HFAD) WITH
SOUNDER, INDICATOR LIGHT, SILENCE/ REST TEST
BUTTON BUILT-IN BATTERY (LOW BATTERY ALERT)
AND INTER-CONNECTION WIRELESSLY WITHIN A HOUSE
 - DPENOTES WEATHERPROOF

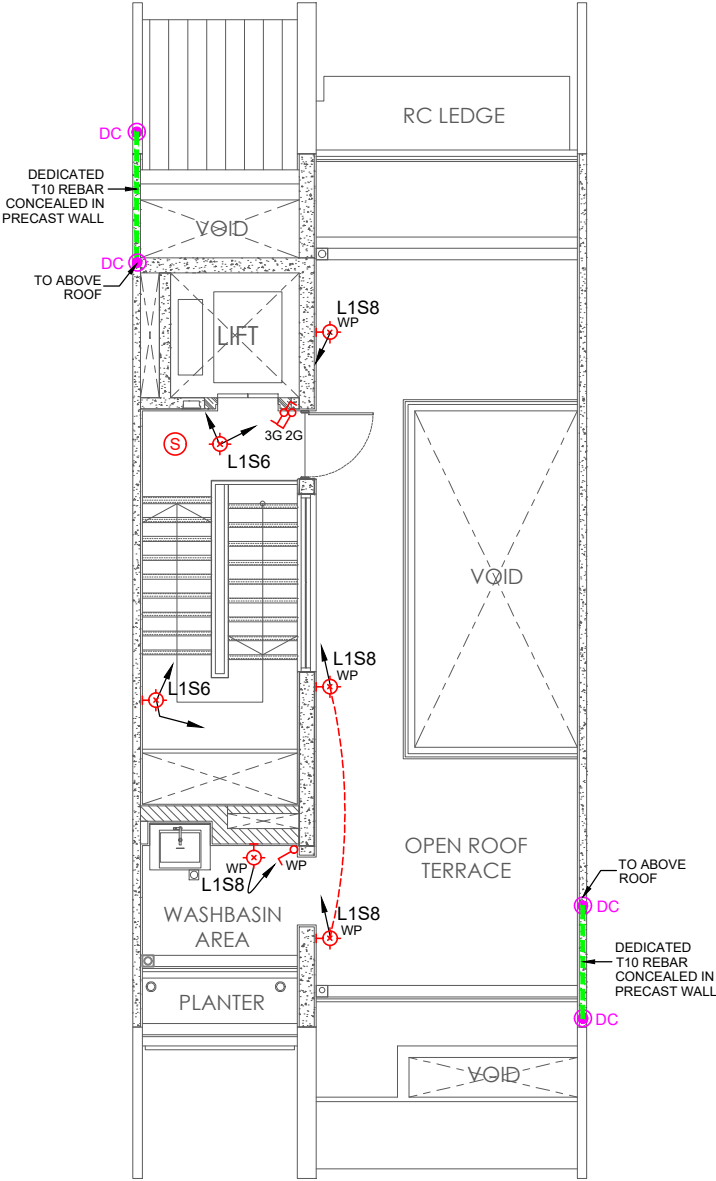

- LEGEND:
- LIGHTING POINT
 - F1 KEONN LLP-CLP-R45X45 (F1) SQUARE LIGHT C/W 30W 3000K LED, INTEGRATED NON-DIM DRIVER AND MC098S SENSOR
 - F2 KEONN LLP-CLP-R45X45 (F2) SQUARE LIGHT C/W 20W 3000K LED, INTEGRATED NON-DIM DRIVER
 - WP WEATHERPROOF WALL MOUNTED LIGHTING POINT
 - MV LIGHT POINT FOR MV FAN POINT
 - NG 10A SINGLE POLE ONE WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - AG AUTOGATE SWITCH
 - PG PEDESTRIAN SWITCH
 - NG 10A SINGLE POLE TWO WAY SWITCH (FIGURE INDICATES NO. OF GANG)
 - INTERMEDIATE SWITCH
 - AT AIR TERMINAL
 - DC DOWN CONDUCTOR
 - B BONDING TO LIGHTNING PROTECTION SYSTEM
 - 25mm x 3mm ALUMINIUM TAPE
 - 25mm x 3mm COPPER TAPE
 - DEDICATED T10 REBAR CONCEALED IN SLAB
 - L EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR LIGHTNING PROTECTION SYSTEM
 - E EARTH PIT INSPECTION CHAMBER C/W EARTH ELECTRODE FOR ELECTRICAL EARTH SYSTEM
 - LIGHTNING PROTECTION TEST LINK
 - STAND ALONE SMOKE DETECTOR (HEAD) WITH SOUNDER, INDICATOR LIGHT, SILENCE/REST TEST BUTTON BUILT-IN BATTERY (LOW BATTERY ALERT) AND INTER-CONNECTION WIRELESSLY WITHIN A HOUSE
 - WP DENOTES WEATHERPROOF

